



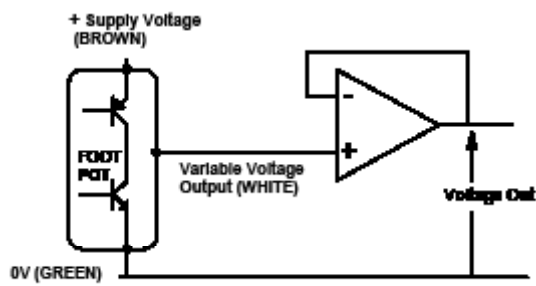

- ▶ Provides a variable voltage output proportional to the position of the pedal
- ▶ Utilising a solid state optical sensor with no moving parts or tracks which can wear out
- ▶ Ideal for repetitive use with office equipment, domestic/ medical appliances and general industrial applications
- ▶ Low cost
- ▶ Customer colours and logos available on request

Specifications	
Standards/approvals	Footswitch: low voltage directive 2014/35/EU, EN 60950
Degree of protection	EN 60529 IPX2
Connection method	3-core cable (2m long) with stripped cable cores or connector of your choice
Electrical rating	4.5V to 12V DC at 10mA
Output voltage range	6% minimum to 95% maximum of input voltage
Output current/type	100µA / Transistor Sink/Source
Operating temperature range	0°C to +40°C
Body material	Thermoplastic
Weight	0.35 kg
Average life expectancy	> 1 000 000 operations

## Dimensions

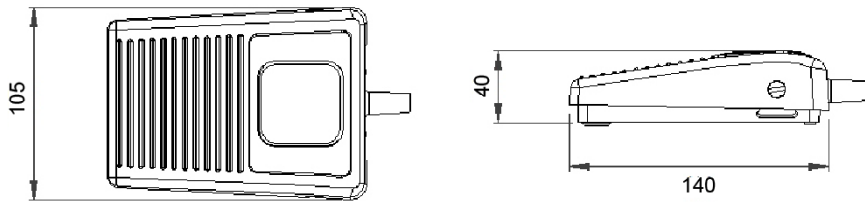

## Accessories

Part Number	Description
6202-0001	Single Black RAL 9005 guard
6202-0002	Single Grey RAL 7035 guard
6202-0003	Twin Grey RAL 7035 guard